

Setting printers

In the case of network printing, the program checks every minute if the printer is accessible. If it is not, it will attempt to rediscover it. It is recommended to use a static DHCP server because the connection is based on IP address, which may change if network devices are restarted.

3 dot menu -> Settings

Sunmi V2s

Brand: sunmi

Sunmi Label Height: 25

Further settings do not have an impact in this case.

Printer Type

Brand: sunmi ▼

Sunmi Label Height: 25 ▼

Brother QL-____

WiFi/Ethernet

Printer setup: [books/devices/page/brother-ql-w-series-wifi-setup](#)

Brand: Brother

Interface: Net

Paper Type: W62 (DK-22205)

1. Press "Search and select printers"

Settings

Printer Type

Brand: brother ▼

Sunmi Label Height: 25 ▼

Printer Settings

Interface: Net ▼

Paper Type: W62 ▼

Quality: Normal ▼

Paper Cut Mode: Always ▼

Secure Height: True ▼

SEARCH AND SELECT PRINTERS

Searching for printers:

Brother QL-820NWB
192.168.5.55
D8:12:65:5B:52:73
H0Z921748
BRWD812655B5273

SELECT

REFRESH

SETTINGS



Bluetooth



Brand: Brother

Interface: Bluetooth

Paper Type: W62 (DK-22205)

1. Pair the printer via Bluetooth
2. Press "Search and select printers"
3. Enable Bluetooth connection
4. Wait for 1-3 seconds

5. Select the printer

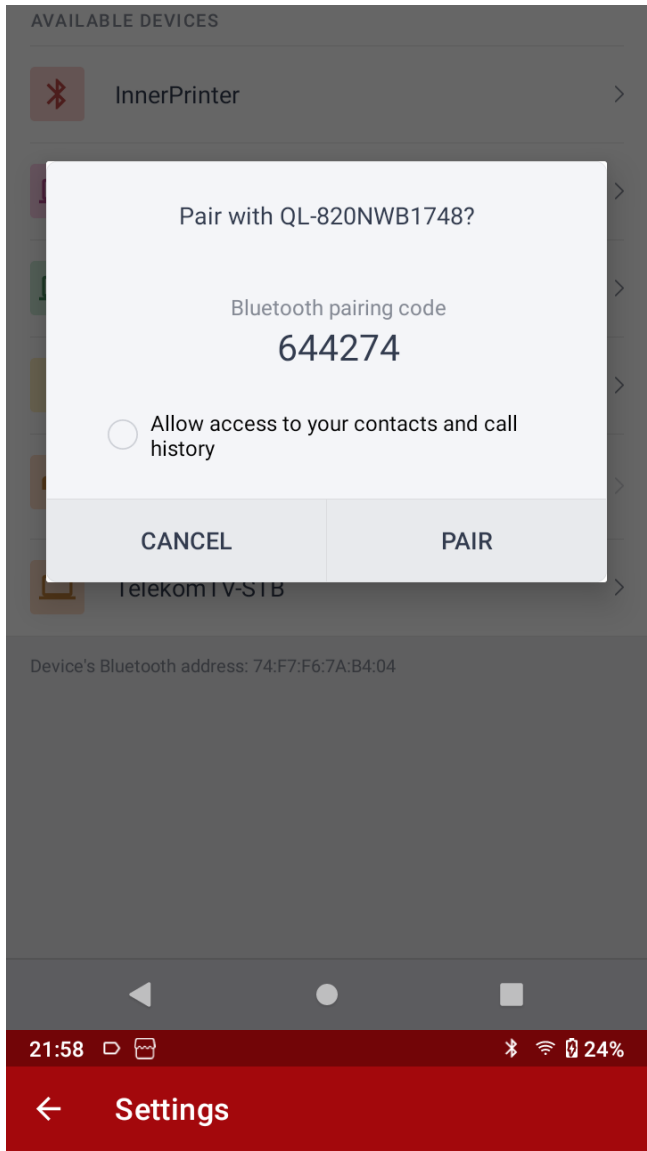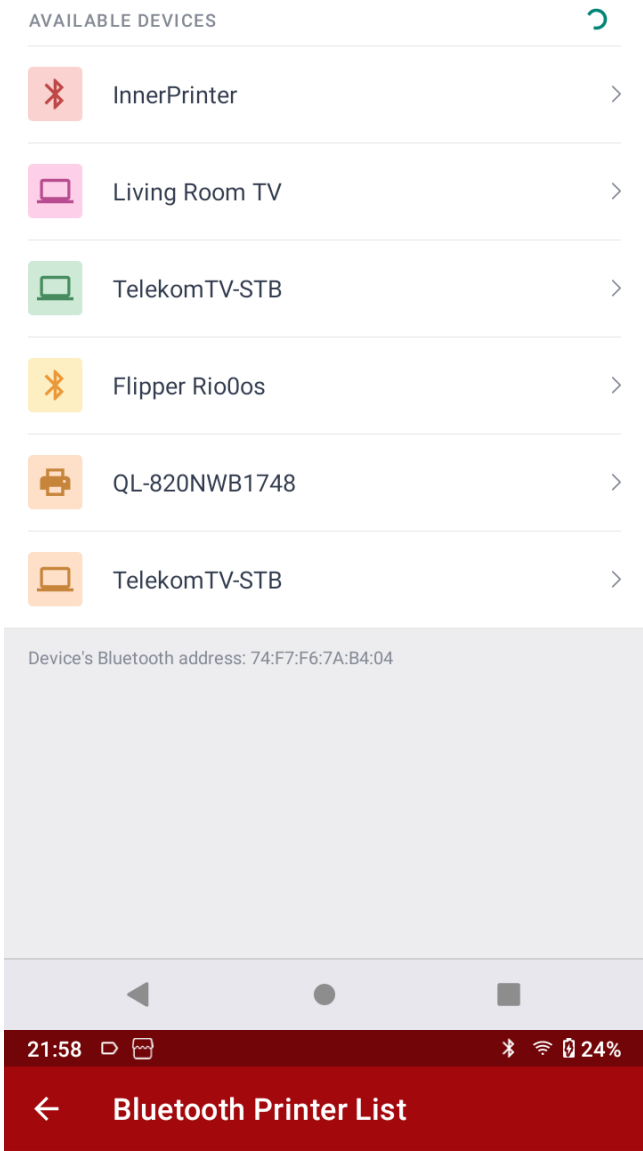

Searching for printers:

InnerPrinter 00:11:22:33:44:55	SELECT
QL-820NWB1748 60:77:71:B5:AE:73	SELECT
REFRESH	SETTINGS

Settings

Printer Type

Brand: brother ▾

Sunmi Label Height: 25 ▾

Printer Settings

Interface: Bluetooth ▾

Paper Type: W62 ▾

Quality: Normal ▾

Paper Cut Mode: Always ▾

Secure Height: True ▾

Revision #1

Created 20 July 2023 19:42:46 by Jozsef Takacs

Updated 20 July 2023 20:03:41 by Jozsef Takacs